


SSV TM113 SERIES DIMENSIONS (4.5" diameter)


SSV TM113B25 Drum Motor (matching Idler KT113B25**)

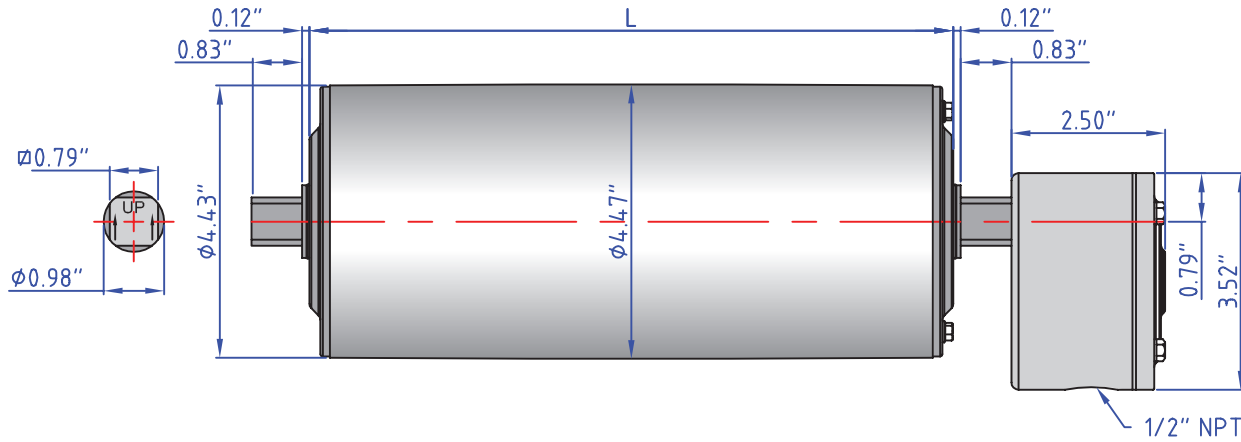


Standard drum motor face widths* (L) in inches:

10.24	10.83	12.20	14.17	16.14	18.11	20.08	22.05	24.02
25.98	27.95	29.92	31.89	33.86	35.83	37.80	39.76	41.73
43.70	45.67							

Bracket AB 20

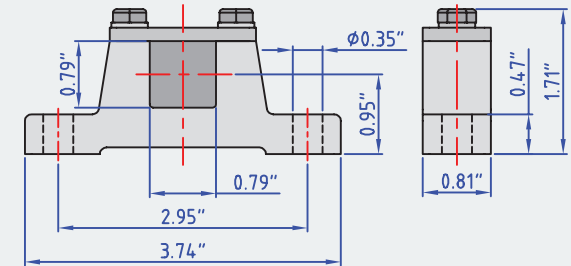

Optional Cable Type



*Some face widths are not available in all horsepower. For minimum available face widths refer to page 16.

**Idler dimensions are identical to the drum motor with no junction box.

SSV TM113 SERIES SPECIFICATIONS (4.5" diameter)



0.75 HP

V (ft/min) M/G	1039 2/S2	945 2/S2	756 2/S2	661 2/S2	591 2/S2	520 2/S2	449 2/S2
Belt Pull (lbs)	22	24	31	35	39	45	50
Drum RPM	1211	1100	880	770	688	605	523

0.5 HP

V (ft/min) M/G	1039 2/PL2	945 2/S2	756 2/S2	661 2/S2	591 2/S2
Belt Pull (lbs)	15	17	21	23	26
Drum RPM	1211	1100	880	770	688

0.5 HP

V (ft/min) M/G	520 4/S2	472 4/S2	378 4/S2	331 4/S2	295 4/S2	260 4/S2	224 4/S2	201 4/PL2	177 4/S2	165 4/PL2	154 4/PL2	142 4/S2	130 4/PL2	118 4/PL2	106 4/PL2	
Belt Pull (lbs)	30	33	41	47	52	60	69	75	88	91	98	109	116	127	141	
Drum RPM	605	550	440	385	344	303	261	234	206	193	179	165	151	138	124	
V (ft/min) M/G	94 4/PL2	80 4/PL2	64 4/PL2													
Belt Pull (lbs)	161	187	215													
Drum RPM	110	94	74													

0.34 HP

V (ft/min) M/G	1039 2/S2	945 2/S2	756 2/S2	661 2/S2	591 2/S2
Belt Pull (lbs)	10	11	14	16	18
Drum RPM	1211	1100	880	770	688

0.34 HP

V (ft/min) M/G	520 4/S2	472 4/S2	378 4/S2	331 4/S2	295 4/S2	260 4/S2	224 4/S2	201 4/PL2	177 4/PL2	165 4/PL2	154 4/PL2	130 4/PL2	118 4/PL2	106 4/PL2	94 4/PL2
Belt Pull (lbs)	21	22	28	32	36	40	47	50	57	62	66	79	86	95	108
Drum RPM	605	550	440	385	344	303	261	234	206	193	179	151	138	124	110
V (ft/min) M/G	80 4/PL2	64 4/PL2													
Belt Pull (lbs)	126	159													
Drum RPM	94	74													

V = Belt Speed (ft/min)

M/G = Motor/Gear Reducer Configuration (at rated horsepower)

High Speed
Low Torque

2/S2 4/S2 6/S2 2/S3 4/S3 6/S3 2/PL2 4/PL2 6/PL2 2/PL3 4/PL3 6/PL3

Low Speed
High Torque

SSV TM113 SERIES SPECIFICATIONS (4.5" diameter)



0.34 HP

V (ft/min) M/G	236 6/S2	213 6/S2	189 6/S2	165 6/S2	142 6/S2	118 6/S2	94 6/S2	69 6/PL2	59 6/PL2	50 6/PL2	40 6/PL2
Belt Pull (lbs)	45	50	55	64	74	89	111	149	172	205	215
Drum RPM	275	248	220	193	165	138	110	80	69	58	47

0.25 HP

V (ft/min) M/G	378 4/S2	331 4/S2	295 4/S2	260 4/S2	224 4/S2	201 4/PL2	177 4/PL2	165 4/PL2	154 4/PL2	130 4/PL2	118 4/PL2	106 4/PL2	94 4/PL2	80 4/PL2	64 4/PL2
Belt Pull (lbs)	20	22	25	29	34	36	41	44	48	56	62	69	78	91	115
Drum RPM	440	385	344	303	261	234	206	193	179	151	138	124	110	94	74

V (ft/min) M/G	47 4/PL3	43 4/PL3	38 4/PL3	31 4/PL3	26 4/PL3
Belt Pull (lbs)	148	165	185	215	215
Drum RPM	55	50	44	36	30

0.25 HP

V (ft/min) M/G	213 6/S2	189 6/S2	165 6/S2	142 6/S2	59 6/PL2	50 6/PL2	40 6/PL2
Belt Pull (lbs)	36	40	46	53	123	148	182
Drum RPM	248	220	193	165	69	58	47

0.16 HP

V (ft/min) M/G	260 4/S2	224 4/S2	201 4/PL2	177 4/PL2	165 4/PL2	154 4/PL2	130 4/PL2	118 4/PL2	106 4/PL2	94 4/PL2	80 4/PL2	64 4/PL2	43 4/PL3	26 4/PL3	17 4/PL3
Belt Pull (lbs)	20	22	24	27	30	32	37	41	46	51	61	77	109	180	215
Drum RPM	303	261	234	206	193	179	151	138	124	110	94	74	50	30	19

V = Belt Speed (ft/min)

M/G = Motor/Gear Reducer Configuration (at rated horsepower)

High Speed
Low Torque

2/S2 4/S2 6/S2 2/S3 4/S3 6/S3 2/PL2 4/PL2 6/PL2 2/PL3 4/PL3 6/PL3

Low Speed
High Torque